

(19)



Europäisches Patentamt

European Patent Office

Office européen des brevets



(11)

**EP 1 210 879 A1**

(12)

**EUROPEAN PATENT APPLICATION**

(43) Date of publication:  
05.06.2002 Bulletin 2002/23

(51) Int Cl.<sup>7</sup>: **A23L 1/211**, A23L 1/277,  
A23J 3/16

(21) Application number: 01309909.8

(22) Date of filing: 26.11.2001

(84) Designated Contracting States:  
**AT BE CH CY DE DK ES FI FR GB GR IE IT LI LU**  
**MC NL PT SE TR**  
Designated Extension States:  
**AL LT LV MK RO SI**

- Katcher, Jay  
New York 10977 (US)
- Hassanein, Azza  
Northbrook, Illinois 60062 (US)

(30) Priority: 30.11.2000 US 250228 P

(71) Applicant: **Kraft Foods Holdings, Inc.**  
Northfield, Illinois 60093 (US)


(74) Representative: **Eyles, Christopher Thomas**  
**W.P. THOMPSON & CO.**  
Celcon House  
289-293 High Holborn  
London WC1V 7HU (GB)

(72) Inventors:  
• Akashe, Ahmad  
Mundelein, Illinois 60060 (US)

**(54) Method of deflavoring soy-derived materials**

(57) Soy derived materials such as soy milk, soy flour, soy concentrates and soy protein isolates, are de-flavored by adjusting the pH of an aqueous composition of such soy derived materials to about 9 to 12 to solubilize the soy proteins and to release the flavoring com-

pounds and thereafter passing the pH-adjusted composition to an ultrafiltration membrane having a molecular weight cutoff up to about 50,000 Daltons under conditions at which the flavoring compounds pass through the membrane, leaving the retained soy material with improved flavor.

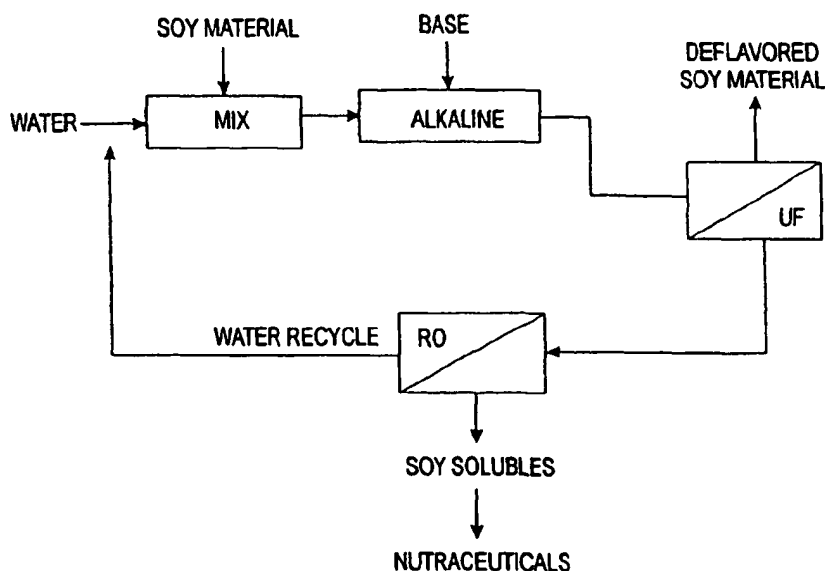**SOY PROTEIN DEFLAVOR****FIG. 8**

**Description****Background of the Invention**

5 **[0001]** This invention relates generally to the processing of soy-derived materials for use in various food products. More particularly, the invention relates to a method of deflavoring soy materials in order to make them acceptable in a wide range of foods.

**[0002]** In recent years, soy proteins have become widely used in food products, for the health benefits to be obtained from their use. In some applications, such as meat analog products, the taste of the soy materials is not objectionable.

10 However, in some uses, such as dairy analog products, beverages and the like, the flavors found in soy materials may prevent their ready acceptance by the consumer. Thus, in order to extend the uses of soy materials, the present inventors wanted to find a method of reducing the flavor components of soy materials. However, it was not evident that methods which had been used previously to remove flavor components from other organic materials would be successful in the treating of soy materials. Organic materials, since they have complex compositions, must be tested to

15 determine whether any given method of treating them will be satisfactory.  
**[0003]** One example of previously employed methods to purify organic materials is found in U.S. Patent 4,477,480, in which the patentees show that starch can be treated with an alkali to remove objectionable flavor components. In a commonly assigned patent, U.S. 4,761,186, ultrafiltration is used to purify starch. In both cases, flavor components are removed from the starch, in the '480 patent by solubilizing the flavor components so that they can be washed out of the relatively insoluble starch. In the '186 patent, ultrafiltration was used to remove the flavor components as permeate, while the insoluble starch remained in an aqueous slurry. By contrast, the present invention separates flavor components from soluble high molecular weight soy proteins.

**[0004]** There are many articles and patents which relate to processing soy materials in order to recover the protein content and which at the same time reduce the flavor compounds to make the proteins more acceptable in food products. However, these previous disclosures were not specifically directed to removal of flavoring compounds and recovering as much of the protein as possible. One example is U.S. Patent 4,420,425 in which protein components of soy are solubilized at a pH of 7 to 11, preferably about 8 and, after ultrafiltration through a membrane having a molecular weight cut off above 70,000, are recovered by spray drying the retained soy proteins. In variants, only a portion of the protein is solubilized at lower pH values and subjected to ultrafiltration with a membrane having a cutoff preferably above 100,000 molecular weight, the product was found to have improved color and flavor. In another patent, US 5,658,714, a soy flour slurry is pH-adjusted to the range of 7 to 10 to solubilize proteins, which are then passed through an ultrafiltration membrane and phytate and aluminum are retained, presumably as solids. While the molecular weight cutoff of the membrane was not given, it is assumed that the pore size was large in order to be able to pass the soluble proteins. Both of these patents contain extensive discussions of the efforts of others in the processing of soy materials.

35 **[0005]** In a group of related patents, Mead Johnson Company disclosed processes for solubilizing soy proteins by raising the pH of an aqueous solution of soy materials and recovering the proteins which are said to have a bland taste. In U.S. 3,995,071, the pH was increased to 10.1 to 14 (preferably 11 to 12) to solubilize soy proteins, after which the pH was lowered to about 6 to 10 and ultrafiltration with a membrane having a molecular weight cutoff of 10,000 to 50,000 Daltons was used to retain the proteins while discarding carbohydrates and minerals. In U.S. 4,072,670, emphasis was placed on removing phytates and phytic acid by solubilizing proteins at a pH of 10.6 to 14 and a temperature of 10 to 50°C to make the phytates and phytic acid insoluble, then separating them and finally acidifying the solution to a pH of about 4 to 5 to precipitate the soy proteins. In U.S. 4,091,120 soy proteins were solubilized at a pH less than 10, preferably 7 to 9 and ultrafiltration was used to separate the proteins as retentate, while passing carbohydrates as permeate.

45 **[0006]** The present inventors wanted to remove compounds in soy materials which contribute color and flavor and which interfere with the use of soy in certain food products such as beverages, dairy analogs and the like. They have found that soy-derived materials can be treated successfully using the process to be described below, recovering substantially all of the proteins and rejecting the compounds which cause undesirable color and flavor. Thus, the product is suitable for many food products.

**Summary of the Invention**

50 **[0007]** Broadly, the invention is a process for preparing an aqueous soy composition having a soy concentration of about 1 to 20 wt %, which is pH-adjusted to solubilize the protein content and to release the flavoring compounds. Then the composition is subjected to ultrafiltration using a membrane capable of retaining substantially all of the protein content of the soy while removing flavoring components as permeate.

**[0008]** In one aspect, the invention is a method of deflavoring soy-derived materials such as soy milk, soy flour, soy concentrates and soy protein isolates, which method includes preparing an aqueous composition of the soy material

containing flavoring compounds, adjusting the pH to the range of about 9 to 12 to solubilize the protein content of the soy material and release the flavor components, and then passing the pH-adjusted composition adjacent to an ultrafiltration membrane having pores which provide a molecular weight cutoff up to 50,000 Daltons thus retaining substantially all of the protein content, while passing through the pores the flavor producing compounds.

**[0009]** In another aspect, the invention includes adjusting the pH to the range of about 9 to 12 with an alkali such as sodium, potassium or calcium hydroxides to solubilize the protein content and releasing the flavor compounds, making it possible to separate such compounds by ultrafiltration.

**[0010]** In one embodiment, the invention is a method for deflavoring soy materials in a continuous process wherein a pH-adjusted aqueous mixture of soy materials is passed adjacent an ultrafiltration membrane to separate the flavor components. The permeate containing flavor components and water is passed adjacent a reverse osmosis membrane to dewater the permeate and the separated water is recycled to join recycled retentate and fresh pH-adjusted soy materials. A portion of the retentate is continually removed and the deffavored soy materials recovered.

**[0011]** In a preferred embodiment, the invention is a method for deffavoring soy materials in a batch or semi-continuous process wherein a pH-adjusted aqueous mixture of soy materials is passed adjacent an ultrafiltration membrane, the permeate is separated for recovery of the flavor components, and the retentate is recycled to join fresh pH-adjusted soy materials. Water is added periodically or continuously to replace the water lost to the permeate and to adjust the concentration of soy materials in the combined stream to a predetermined level. The process is continued until all of the flavoring compounds have been removed.

**[0012]** The ultrafiltration membrane used in the method of the invention will have a molecular weight cutoff up to 50,000 Daltons, preferably 1,000 to 50,000, most preferably about 10,000 and preferably is a polyethersulfone or ceramic membrane.

#### Brief Description of the Drawing

**[0013]**

Figure 1 is a graph of the intensity of soy flavor attributes.

Figure 2 is a graph of the intensity of deffavored soy milk compared to a control sample

Figure 3 is a graph of the intensity of another group of soy flavor attributes.

Figure 4 is a graph of the intensity of deffavored soy concentrate and a control sample compared to the sample of Figure 3.

Figure 5 is a graph of the intensity of deffavored soy concentrate and a control sample.

Figure 6 is a graph showing the change in concentration of flavor compounds between a deffavored soy sample and a control sample.

Figure 7 is a graph showing the change in concentration of flavor compounds between a deffavored soy sample and a control sample.

Figure 8 is a block diagram of one process employing the invention.

Figure 9 is a graph of the intensity of soy isolate flavor attributes.

Figure 10 is a graph of the intensity of deffavored soy isolate compared to a control sample.

#### Description of the Preferred Embodiments

##### Soy-Derived Materials

**[0014]** Soybeans are valuable sources of oil and, in the present invention, of proteins. Soy beans contain about 40 wt.% proteins, which have been classified after ultracentrifugation as 2, 7, 11S and 15S (see also U.S. 4,420,425). These fractions may contain other materials as well and they have a wide molecular-weight range. It is well known that soy products have undesirable odors and flavors which should be removed in order to make the soy materials widely useful in food products. It is believed that lipoxygenases catalyze the oxidation of certain polyunsaturated fatty acids, producing hydroperoxides which are degraded into volatile carbonyl compounds, associated with objectionable odors and flavors in soy-derived materials. Some of the compounds associated with soy flavors are described in Table C in Example 10 below.

**[0015]** While the protein content of soy-derived materials is considered a valuable fraction for use in food products, soluble carbohydrates are considered undesirable. Their removal from soy protein fractions is an objective in many processes in which the proteins are recovered.

**[0016]** Phytates are compounds which also are considered undesirable in soy proteins. These compounds are calcium-magnesium-potassium salts of inositol hexaphosphoric acid. Such compounds are believed to chelate metal ions and are not readily absorbed by the human body. They are considered to bind to soy proteins and interfere with diges-

tion. As mentioned above, removal of phytates has been an objective of workers in the field of soy-derived materials.

#### Ultrafiltration Membranes

**[0017]** Filtration is used to separate many materials. In the present invention, ultrafiltration is used to remove flavoring compounds from soy-derived materials. Ultrafiltration is intended to remove particles having a size between 10 to 1,000 Angstroms (0.001 to 0.1  $\mu\text{m}$ ), corresponding generally to particles having a molecular weight between 10,000 and 1,000,000, and which may also be affected by the shape of such high molecular weight particles. Soy proteins have molecular range between about 3,000 and 600,000. A membrane may be chosen which is capable of passing all of the soy proteins or only a selected portion. In the present invention, the soy proteins are retained by the ultra filtration membrane under the selected operating conditions, while the lower molecular weight flavoring compounds pass through the membrane and are separated, thus improving the color and flavor of the retained soy proteins and associated solids.

**[0018]** A polymer ultrafiltration membrane may be defined as an anisotropic (nonuniform) layer. One face is a skin containing pores which determine the size of molecules which can pass through the membrane. Supporting the surface skin is a spongy structure which extends to the opposite face. Such membranes are commonly made by coagulation of polymers in an aqueous bath. Typical polymers which are used include polysulfones, cellulose esters, poly(vinylidene-fluoride), poly (dimethylphenylene oxide), poly (acrylonitrile), which can be cast into membranes. Often, the membranes are formed into hollow tubes which are assembled into bundles, through which the solution to be filtered is passed. Alternatively, flat membrane sheets and spiral designs may be used. In commercial practice, pressure is applied to facilitate movement of the lower molecular weight compounds through the membrane. The membrane must be able to withstand the pressures used, making it important that the spongy supporting structure be uniform to avoid breaking the surface skin and bypassing the membrane.

**[0019]** In addition to the polymeric membranes just described, other materials have been used to make ultrafiltration membranes, such as ceramics and sintered metals. The present invention is not limited to any particular type of membrane. In general, the membrane must be able to pass the flavoring compounds, which are believed to have molecular weights lower than 1,000 Dalton. More importantly, the membranes must be able to retain substantially all of the solubilized soy proteins. Thus, the membrane of the invention will have a molecular weight cutoff up to about 50,000 Daltons, preferably about 1,000 to 50,000, more preferably 10,000 to 30,000.

#### Process

**[0020]** The process of the invention includes the following steps:

- Prepare an aqueous mixture of the soy-derived material.
- Add a base to raise the pH of the aqueous mixture to about 9 to 12 in order to solubilize the soy proteins and to release the flavoring compounds.
- Pass the pH-adjusted mixture adjacent to an ultrafiltration membrane having a molecular weight cutoff up to about 50,000, remove the flavoring compounds as permeate, and remove the remaining soy proteins and other soy materials as retentate.
- Neutralize the retentate and recover the soy proteins.

**[0021]** The first step requires little discussion. All types of soy materials are considered to be potential sources of soy for use in food products. Thus, soy materials which contain proteins are combined into an aqueous mixture, generally a slurry of soy solids. The protein content is needed for food products, but as discussed above, it is believed to contain flavoring compounds which must be released in order that they can be separated. The separation of flavoring compounds is carried out in an aqueous mixture in which both the proteins and flavoring compounds are dissolved. The concentration of the soy materials in the aqueous mixture will be in the range of about 1 to 20 wt%. Generally, the concentration of soy materials after pH adjustment will change during the subsequent ultrafiltration step as water is removed with the permeate. The water will be replaced either periodically or continuously. For example, in diafiltration water is added to gradually dilute the retained proteins in a batch or semi-continuous process.

**[0022]** The second step, as will be seen in the examples, is important if removal of the flavoring compounds is to be accomplished. The soy proteins are solubilized by adding a base to the aqueous mixture to achieve a pH of about 9 to 12. In general, it has been found that a pH of 9 is needed to solubilize all of the proteins, while a pH higher than 12 is likely to cause undesirable degradation of the proteins. While in theory, any base might be used, sodium or potassium hydroxide are preferred, particularly potassium hydroxide. Other bases which may have application include calcium, magnesium and ammonium hydroxides. It is believed that solubilizing the soy proteins changes their shape and in some manner results in releasing the flavoring compounds, which may be bound or encapsulated by the soy proteins

when they are in a neutral or acid solution. The flavoring compounds, which have relatively low molecular weight compared to the soy proteins are able to pass through the pores of the ultrafiltration membrane, while substantially all of the solubilized soy proteins are too large and are retained.

**[0023]** The third step could be carried out in a batch manner similar to the laboratory experiments reported below in Examples 1-5 in which the flavor compounds and water passed through the membrane and were removed by flowing water. However, in commercial applications of the process of the invention, the pH-adjusted aqueous mixture would be circulated continuously adjacent to an ultrafiltration membrane. Since water, the caustic and the flavoring compounds pass through the membrane as permeate and are discarded, additional water will be added to maintain the desired concentration of soy materials, which will tend to lower the pH of the aqueous mixture. This water may be augmented by dewatering the permeate and recycling the recovered water to the feed stream. Further neutralization of the filtered solution may be accomplished by withdrawing product and adding an acid as required to reach the desired pH. After pH adjustment, the aqueous mixture of soy proteins and other materials may be used directly in food products, or it may be concentrated or dried as required for the intended use.

**[0024]** A process for deflavoring soy materials by ultrafiltration may be operated in various ways. Two methods will be described, continuous processing and batch (including semi-continuous operation) processing. It is expected that commercial processes will adopt batch or semi-continuous operation, which should be better suited to production of food-grade soy products. A continuous process is generally shown in Figure 8. In either a continuous or batch process an aqueous mixture of soy materials is pH adjusted to solubilize soy proteins and release flavor compounds and then passed adjacent an ultrafiltration membrane which permits the lower molecular weight flavoring materials to pass through its pores along with water (the permeate), leaving the higher molecular weight soy materials (the retentate) to be recirculated. A portion of the retentate will be withdrawn as deflavored product, from which the soy materials can be recovered as needed for the ultimate end use. Water will be added to replace that lost in the permeate and to provide a constant concentration of soy materials in the feed stream supplied to the ultrafiltration membrane. Although not essential to the process, the process of Figure 8 includes additional processing of the permeate to recover a portion of the water using a reverse osmosis membrane for recycling to join the retentate and fresh soy materials. The advantage of such a step is in reducing the amount of fresh water which must be added to the process and removed in concentrating the permeate.

**[0025]** In a batch process, such as those described in Examples 6-8 below, a batch of soy material is placed in a vessel, pH adjusted, and fed to an ultrafiltration membrane. The permeate is separated and the retentate is returned to the vessel. As the process proceeds, the soy material is depleted in the lower molecular weight flavoring compounds and water and becomes more concentrated in the desirable soy proteins. Periodically, water is added to the retentate to dilute it and provide a carrier for the flavoring compounds which are passed through the membrane. In a semi-continuous process the water is added continuously at the rate it is being removed in the permeate. The process is continued until all of the flavoring compounds have been removed and the retentate is sufficiently deflavored to become the product, which can be further processed as required for the ultimate end use. A batch or semi-continuous process may also include the concentration of the permeate, with recycle of separated water in a similar manner as that shown in Figure 8.

**[0026]** The ultrafiltration membrane will be operated with a pressure differential across the membrane which assists migration of the flavoring compounds, water and other materials which are capable of passing through the pores of the membrane, while not exceeding the physical strength of the membrane. Typical average pressure for such membranes are about 50 psi (345.kPa). The trans-membrane pressure (in versus out) will be about 15 psi (103 kPa). The flow rate of the feed stream will provide sufficient residence time for significant permeate removal, but also will be high enough to provide turbulence so that the access of the feed stream to the membrane pores will not be hindered by solid deposits on the membrane walls. One skilled in the art will understand that suitable operating parameters will be determined by experience with the materials being separated.

#### Example 1

**[0027]** Soy protein isolate (Protein Technology International) was hydrated in tap water to provide a concentration of 10 wt %. The aqueous composition was mixed with a magnetic stirrer until all of the soy protein isolate was completely dispersed. The pH of the mixture was adjusted to 11.0 using sodium hydroxide. Then, the pH-adjusted composition was placed in a dialysis tube (Spectrum, Inc.) having a 3500 molecular weight pore size and tap water was passed over the outside of the tube continuously for about 4 hours. The composition remaining in the dialysis tube was poured into a glass beaker, neutralized, and evaluated for aroma and taste. A comparison was made with the dialyzed composition and a sample treated in a similar manner, but which had a pH of 6.7 and a second sample which had been neither dialyzed nor pH-adjusted. Blind evaluation by several individuals showed that only the pH-adjusted and dialyzed sample had significantly improved taste and aroma.

## Example 2

**[0028]** A similar test was carried out using soy milk (Devansoy Farms, Carrol, Iowa) made into a 10 wt % aqueous composition and then pH-adjusted and dialyzed overnight as in Example 1. After the treatment, the pH of the sample was 8.8 and the aroma and taste were significantly improved.

## Example 3

**[0029]** Example 2 was repeated with soy milk freshly prepared by soaking and blanching the beans and then grinding and separating the soy milk from the meal. After pH adjustment and dialysis as previously described, it was found that the taste and aroma of the soy milk was significantly improved.

## Example 4

**[0030]** Example 3 was repeated using a dialysis tube having a pore size of 6000 molecular weight and similar results were obtained.

## Example 5

**[0031]** Example 2 was repeated with dry soy flour (Cargill). The soy flour was hydrated to a 10 wt % composition and then pH-adjusted as previously described. After dialyzing overnight the pH of the remaining composition in the dialysis tube had a pH of 8.7 and had significantly improved aroma and taste.

## Example 6

**[0032]** In a large mixing tank 33 pounds (15 kg) of Sun Rich soy milk containing 15 wt % solids was diluted with 66 pounds (30 kg) of water to produce a slurry of 100 pounds (45 kg) containing 5 wt % soy solids. A 1N NaOH solution was added slowly to solubilize the soy proteins until a pH of 11 was reached.

**[0033]** A diafiltration of the alkalinized soy solution was carried out by pumping the solution from the mixing tank through two parallel hollow fiber membranes (A/G Technology Corporation) having a molecular weight cutoff of 10,000 Daltons and a surface area of 3.3 m<sup>2</sup>. The trans-membrane pressure across the membranes was 20-50 psi (138-345 kPa). The material passed through the membrane (permeate) was collected. The remaining material (retentate) was continuously recycled to the mixing tank. When 50 pounds (22.7 kg) of permeate had been collected, the mixing tank contained 50 pounds (22.7 kg) of soy solution. An additional 50 pounds (22.7 kg) of water was added to the mixing tank. This washing with addition of water to the mixing tank was repeated five times, after which the solution in the mixing tank was concentrated to about 10 wt % solids as water was removed in the permeate and then the retained soy solution was neutralized with 2 wt % citric acid to a pH of 7.0.

**[0034]** The neutralized solution was evaluated by a trained sensory panel and compared with a control sample of Sun Rich soy milk which had been diluted to 10 wt % with water, but not otherwise treated. The soy solutions were presented in a blind and randomized order. The results are shown in the graphs of Figures 1 and 2.

**[0035]** Figure 1 shows the mean intensity score for 10 attributes. The panel judged certain attributes to be more significant than others. When compared to the soy solution which had been treated as described above, the outstanding attributes had all been reduced with a 95% confidence level. Those attributes which had less prominent in the control (i.e. Brown, Sweet, Sour, Salt and Bitter) were reduced, except for Sweet which increased in value, but the panel mean values did not reach a 95% confidence level.

**[0036]** It is clear from the results that the soy solution had been rendered more neutral in flavor by removal of flavor components.

## Example 7

**[0037]** Ten pounds (4.55 kg) of a soy protein concentrate (Central Soya) was mixed with 190 pounds (86.4 kg) of water in a tank with high agitation for 15-30 minutes to hydrate the soy protein. Then 1 N NaOH was added to solubilize the soy protein to a pH of 11. In a similar manner to that described in Example 6 the soy slurry was pumped through a spiral membrane (Gea Niro Inc.) having a molecular weight cutoff of 10,000 Daltons. The trans-membrane pressure across the membrane was maintained below 50 psi (344.7 kPa). While the pressure drop through the membrane was maintained below 15 psi (103.4 kPa). As in Example 6, five additions of water were made when the permeate withdrawn from the membrane reached one-half of the original volume in the mixing tank. After five water additions the pH of the washed soy solution was adjusted to 7.5 by adding 0.5 N HCl and then freeze dried for sensory evaluation.

[0038] The deflavored soy protein concentrate was evaluated for six attributes by a trained sensory panel. The mean values for each attribute for the control sample (untreated) are given in Figure 3. In this example a difference was found between the deflavored soy concentrate and the control, but none were at the 95% confidence level, although all the values were lower. This is shown in Figure 4. Also included are the results of a blind control used, which was rated after the deflavored sample. In this case, the blind control was found to have stronger flavor attributes than the original control of Figure 3. It is believed that this occurred because the blind control in this example was tested after the deflavored sample and appeared to the panel to have a relatively stronger flavor in the second evaluation of the control. However, when compared with the blind control sample, the deflavored sample showed significant differences for three of the flavor attributes at the 90% of 95% confidence level, as shown in Figure 5.

#### Example 8

[0039] The membrane used to deflavor soy proteins should have a molecular weight cutoff of 10,000 Daltons, shown to be effective in Examples 6 and 7. A higher molecular weight cutoff membrane can be used if desired, but at a molecular weight cutoff of 50,000 Daltons some valuable proteins have been lost in the permeate, as is shown in this example.

[0040] Five pounds (2.27 kg) of a dry soy isolate (Supro-670 PTI) was mixed with 95 pounds (43.2 kg) of water as in Example 7 to provide a slurry containing 5 wt % soy solids. 1 N NaOH was added to raise the pH to 11 and solubilize the soy proteins. Diafiltration using five additions of water was carried out in a manner similar to that described in Examples 6 and 7 and using the hollow fiber membranes of Example 6. Samples of the permeate were taken at five minute intervals, neutralized and frozen for protein analysis.

[0041] The permeate samples were analyzed for total protein content by electrophoresis, with the results shown in the following table:

Table A

Time, Min.	Molecular Weight Cutoff	
	10,000 Daltons Wt.% Protein	50,000 Daltons Wt. % Protein
0	0	0.4
5	0.6	1
10	0.8	0.6
15	0.4	0.6
20	0.4	0.6
25	0	0.4
30	0	0.4
35	0.5	0.4
40	0	0.3
45	0	N/A

[0042] It can be seen that the membrane having a 10,000 Dalton cutoff retains more protein than the membrane having a 50,000 Dalton cutoff. The value at 35 minutes for the 10,000 Dalton membrane is believed to be erroneous.

#### Example 9

[0043] Samples of soy materials deflavored using the methods of Examples 6-8 were analyzed by protein gel electrophoresis. The results indicate that the molecular weight distribution of the retained soy materials was substantially the same as that of the original soy material. The results are shown in the following table:

Table B

Soy Material						
Molecular Weight, KD	Soy Flavor		Soy Isolate		Soy Isolate	
	% Control	% Deflavored	% Control	% Deflavored	% Control	% Deflavored
>27	74	73	21.7	19.7	22	20
14-27	18	19	30.8	32.2	31	32
3.5 - 14	7	8	47.4	48	45	48
<3.5	0	0	0	0	0	0

Soy Milk	
% Control	% Deflavored
69	70
20	21
10	9
0	0

#### Example 10

**[0044]** Analysis were carried out for the chemical constituents associated with the flavor attributes determined by the sensory panels described in previous examples. Two samples of soy protein isolates were tested. One sample had been deflavored by the method described in Example 7; the second sample had not been deflavored.

**[0045]** In a first test, one gram of a control sample was diluted with 15g of water, 2 $\mu$ l of 300ppm of 4-heptanone was added as an internal standard, and the mixture was purged with 100 ml/min of helium at 60°C for 30 min. A deflavored sample was prepared similarly as the control sample, except that the pH was raised to 10 by adding a NaOH solution in order to solubilize the proteins. The volatile compounds were analyzed by GC/MS (HP GC5890/MSD5972). The results for various compounds are shown in Figures 6 and 7. The deflavored soy sample contained smaller amounts of the flavoring compounds.

**[0046]** In a second test, three gram samples were diluted with 30g of water and 2 $\mu$ l of 300ppm 4-heptanone was added as an internal standard. The resulting mixtures were purged with 100 ml/min of helium at 60°C for 20 min to remove the volatile compounds. The volatiles were analyzed by gas chromatography and the odor of the compounds judged by human criteria. The odors associated with specific chemical compounds are reported in the following table:

Table C

Odor characteristics of decreased compounds after deflavoring process.		
Compounds	Odor in SPI control	Odor in deflavored SPI
1-pentanol	faint, green	weak fatty
2-Et phenol	spicy, herbaceous	ND
1-nitropentane	ND	ND
1-octen-3-ol (m/z 57)	mushroom, earthy, very strong	mushroom, earthy, strong
2,4-heptadienal	ND	ND
3-octen-2-one	ND	ND
2,4-heptadienal	ND	weak green
1-nitrohexane	rosy, clove?	rosy?
acetophenone	burnt, floral, caramel	burnt, carmel
3,5-octadien-2-one (m/z 95)	ND	ND

Table C (continued)

Odor characteristics of decreased compounds after deflavoring process.		
Compounds	Odor in SPI control	Odor in deffavored SPI
3,5-octadien-2-one (m/z 95)	green, floral, fatty	fatty, green
2,4-nonadienal	fatty, oily, deep-fried	fatty, oily, deep-fried
2,4-decadienal (m/z 81)	fatty, oily, musty	green onion, painty
4-(1-methylpropyl)-phenol	bubblegum, fruity	ND
2,4-decadienal (m/z 81)	fatty, oily, waxy	fatty, oily, green
2-pentylfuran (m/z 81)	green, floral, etherous	green, floral, etherous
3-octen-2-one	floral, green, earthy	floral

Example 11

[0047] Application of soy materials to food products was illustrated by adding deffavored soy material to a Balance Bar® a product of Kraft Foods and comparing the flavor with an equivalent Balance Bar containing the same soy material, but which had not been deffavored. In one sample all of the soy material was a dry soy isolate (Supro-661 PTI), in the second sample 50% of the soy material had been deffavored by the diafiltration process of the examples and 50% was not deffavored. A taste panel preferred the second sample 8 to 3, scoring 6.11 on a scale of 1-10, versus a score of 3.5 for the first sample.

Example 12

[0048] In a manner similar to Example 6, samples of soy isolate were compared, deffavored according to the process of the invention and the control sample of soy isolate, concentrated in proteins was hydrated in water to a 10 wt % solution. Figure 9 shows the results found by a trained sensory panel for the control sample. The deffavored sample was compared to the control by the panel, which found, as can be seen in Figure 10, that many of the characteristic attributes of the control sample had been reduced. However, it was found that the flavor designated oxidized had increased.

**Claims**

1. A method of deffavoring soy-derived materials comprising:


- (a) preparing an aqueous composition of a soy material containing soluble soy proteins, flavoring compounds and insoluble materials;
- (b) solubilizing the soy proteins by adjusting the aqueous composition of (a) to a pH in the range of about 9 to 12 and releasing said flavoring compounds;
- (c) passing the pH-adjusted aqueous composition of (b) adjacent an ultrafiltration membrane having a molecular weight cutoff up to about 50,000 Daltons under suitable ultrafiltration conditions wherein said flavor compounds pass through said membrane, thereby deffavoring said soy material and retaining substantially all of said solubilized soy proteins; and
- (d) recovering the retained deffavored soy proteins.

2. A method according to claim 1, wherein step (c) comprises separating as permeate the flavor compounds and water passed through said membrane and separating as retentate the aqueous composition depleted by permeate removal; and further including:


- (i) passing the flavor compounds and water separated in (c) adjacent a reverse osmosis membrane and separating water passed through said reverse osmosis membrane;
- (ii) recycling water separated in (i) and the retentate separated in (c) to the aqueous composition of step (b);
- (iii) recovering the flavor compounds leaving the reverse osmosis membrane after water separation in step (i);
- (iv) withdrawing as a deffavored soy material a portion of the retentate;

(v) recovering the deflavored soy material from the withdrawn portion of step (iv):

3. A method according to claim 2, wherein said deflavored soy material is continuously withdrawn from said retentate.
- 5 4. A method according to claim 2, wherein said deflavored soy material is withdrawn periodically from said retentate.
5. A method according to any one of claims 2 to 4, further comprising the step of adding fresh water to the aqueous composition of step (b).
- 10 6. A method according to claim 1, wherein step (c) comprises separating as permeate the flavor compounds and water passed through said membrane and as retentate the aqueous composition depleted by permeate removal; and further including:
  - (i) recovering the flavor compounds from the permeate;
  - 15 (ii) recycling the retentate of (c) to the aqueous composition of step (b);
  - (iii) adding water to the combined retentate and aqueous composition of (b) to achieve a predetermined concentration of soy materials;
  - (iv) repeating steps (c) and (i) to (iii) until the flavoring compounds have been removed in the permeate.
- 20 7. A method according to claim 6, wherein in step (iii) water is added periodically.
8. A method according to claim 6, wherein in step (iii), water is added continuously.
9. A method according to any one of claims 1 to 8, wherein said soy material is at least one member of the group  
25 consisting of soy milk, soy protein isolate, soy concentrate and soy flour.
10. A method according to any one of claims 1 to 9, wherein said aqueous composition of (a) has a concentration of soy material in the range of about 1 to 20 wt%.
- 30 11. A method according to any one of claims 1 to 10, wherein said ultrafiltration membrane has a cutoff in the range of 1,000 to 50,000 Daltons.
12. A method according to claim 11, wherein said ultrafiltration membrane has a cutoff in the range of 10,000 to 30,000 Daltons.
- 35 13. A method according to any one claims 1 to 12, wherein said ultrafiltration is carried out at a temperature in the range of 10 to 60°C and a suitable pressure.
- 40 14. A method according to any one of claims 1 to 13, wherein said ultrafiltration membrane is a polymer or ceramic membrane.

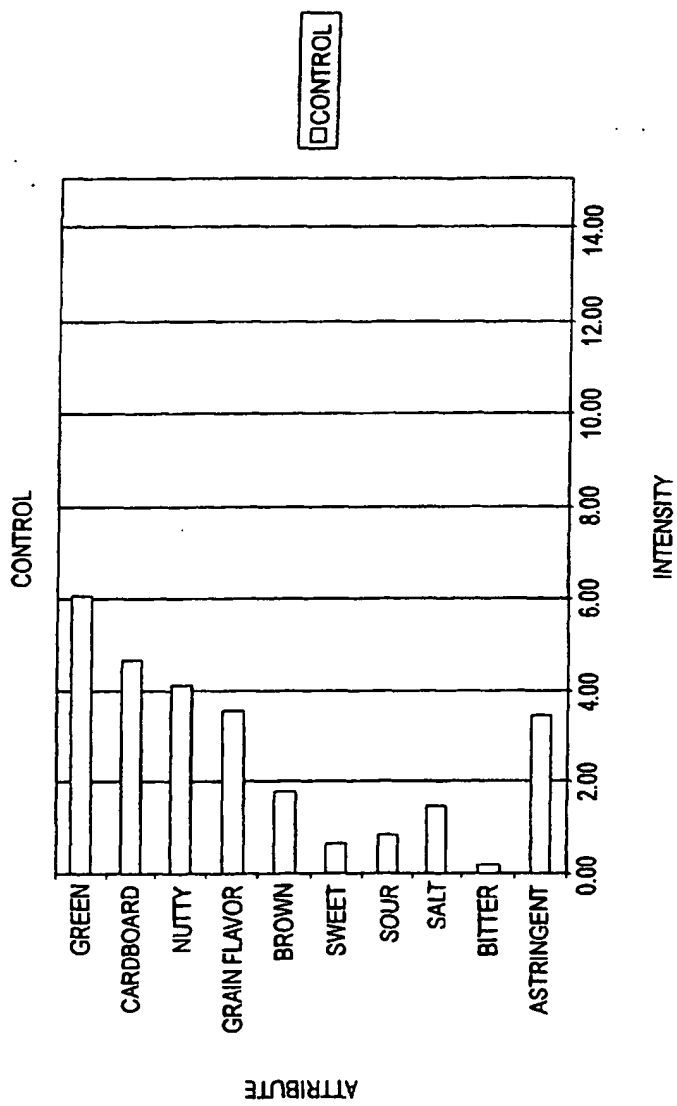

**FIG. 1**

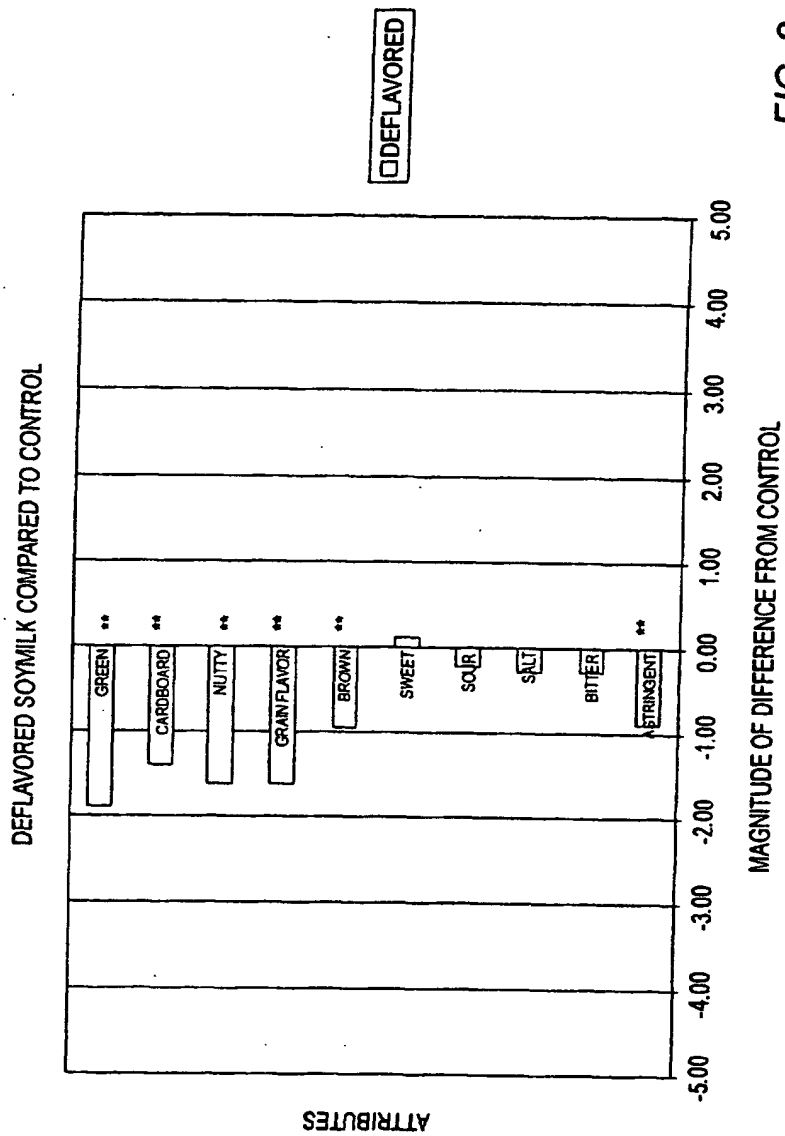

**FIG. 2**

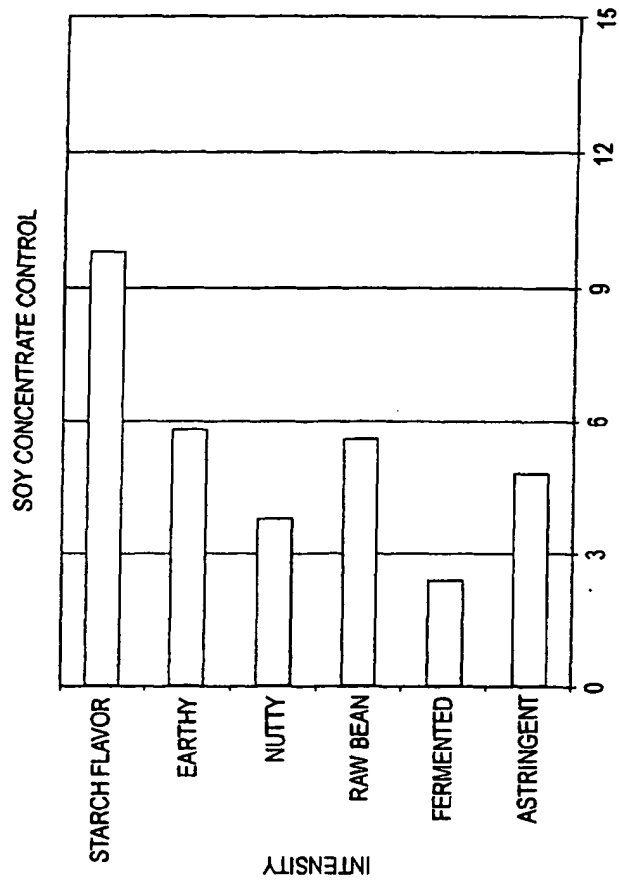


FIG. 3

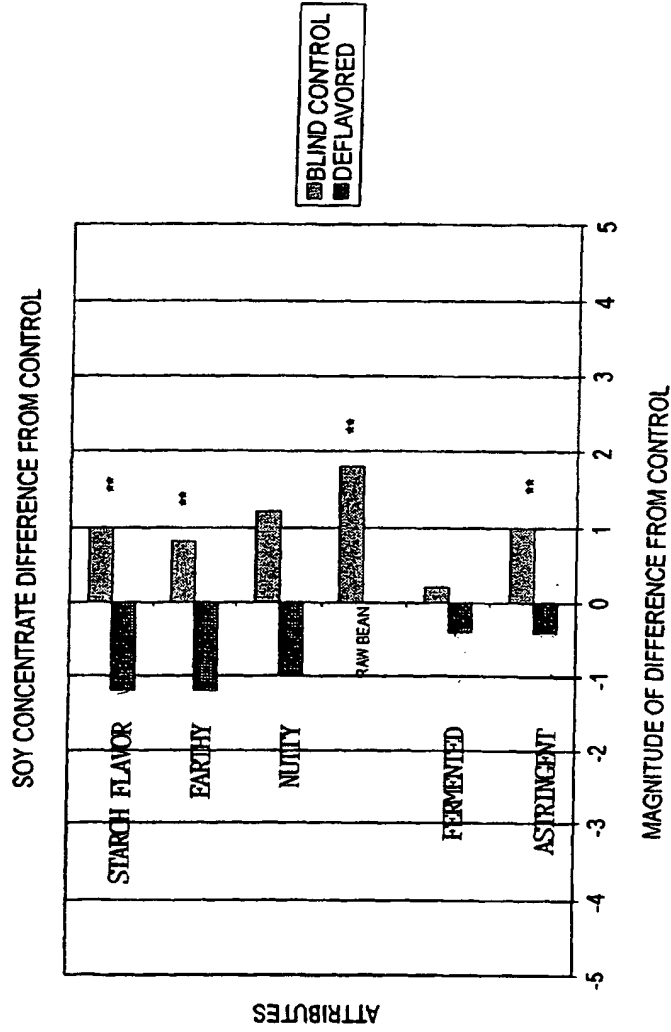


FIG. 4

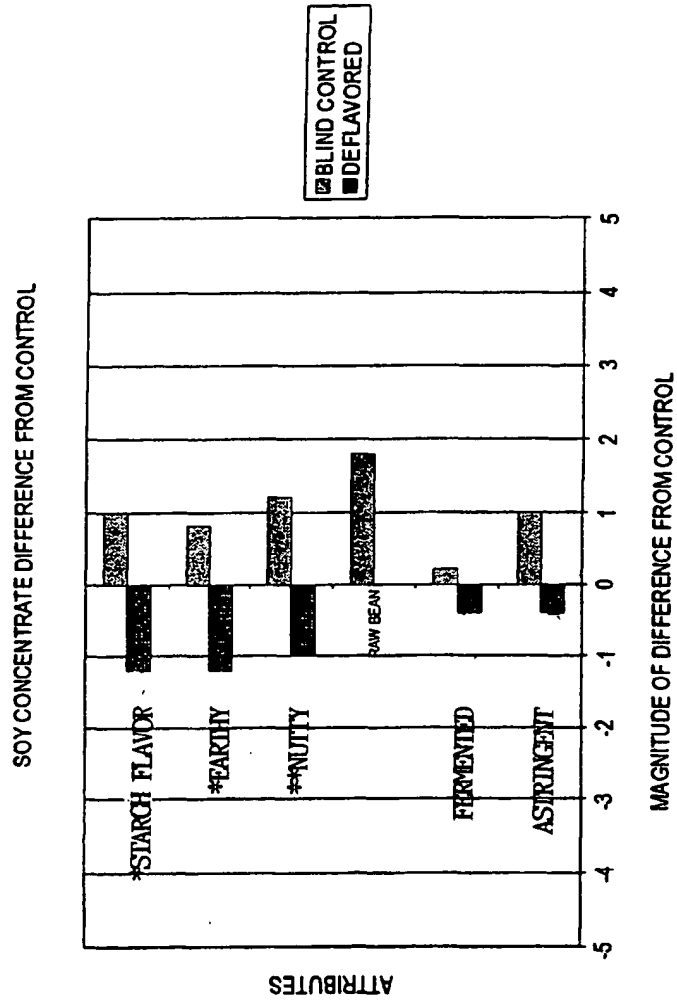


FIG. 5

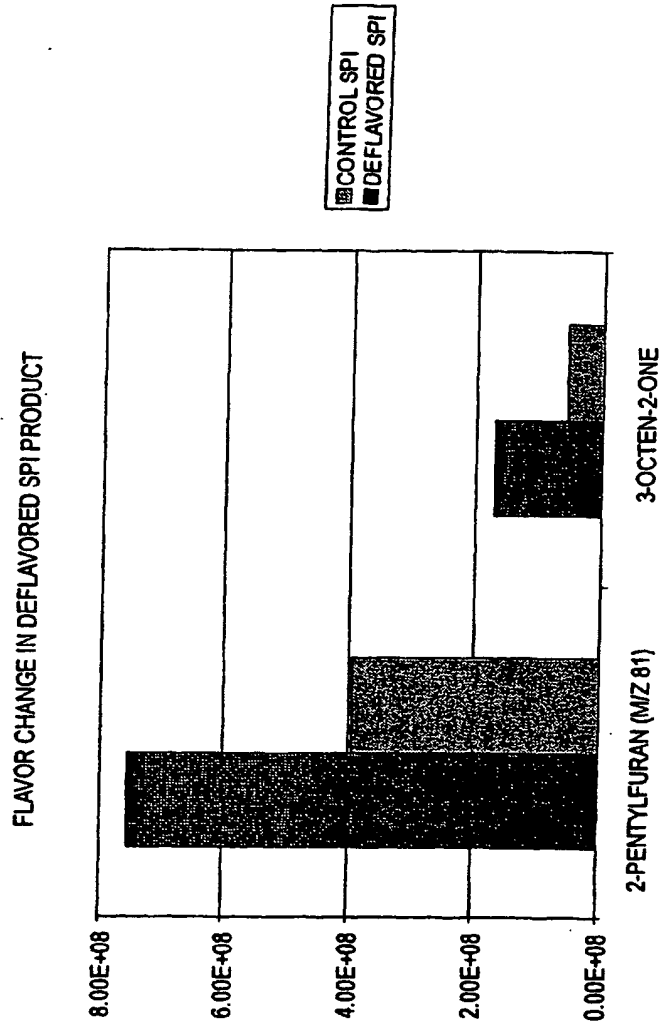
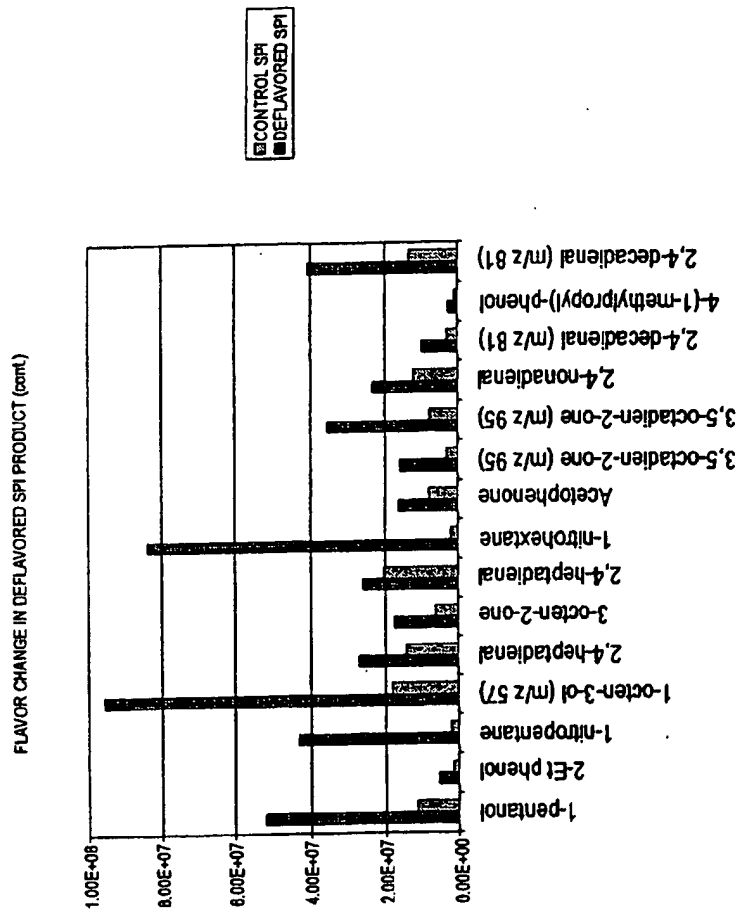
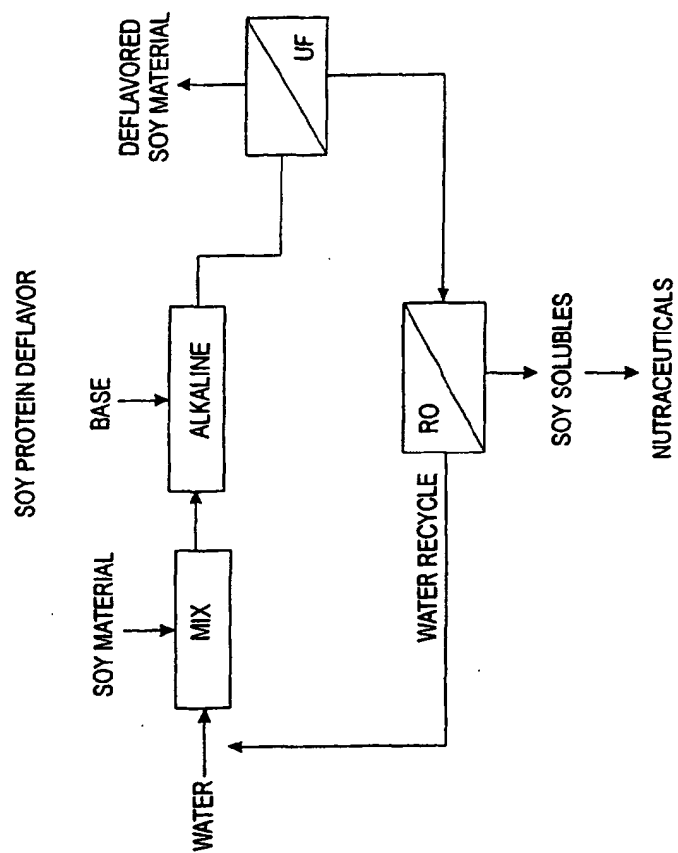


FIG. 6

FIG. 7



FIG. 8

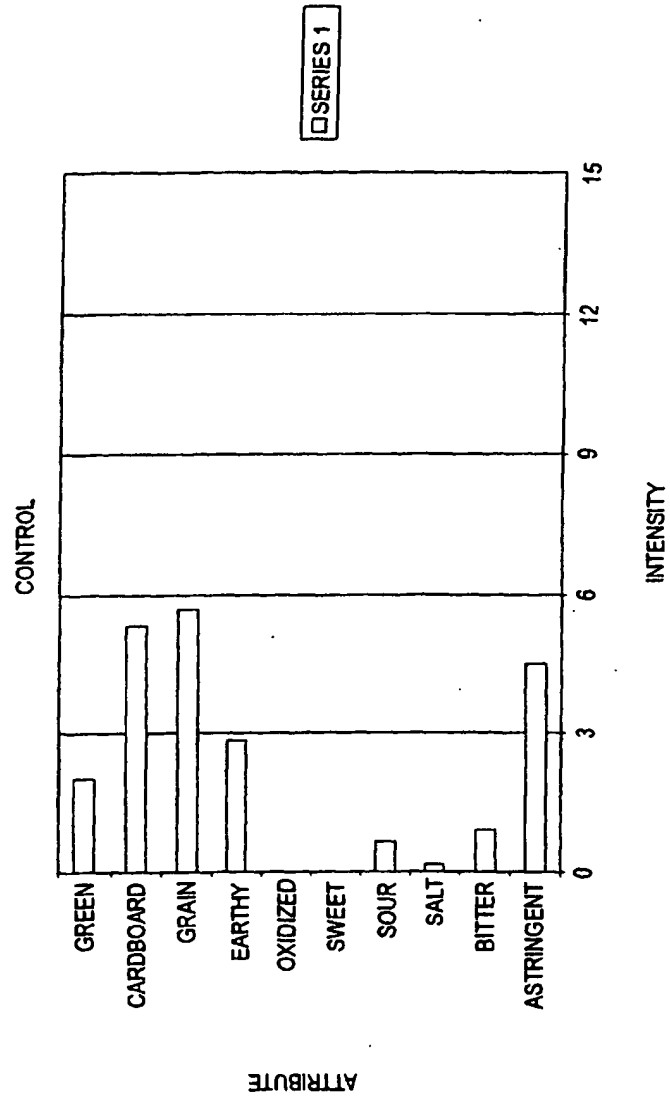


FIG. 9

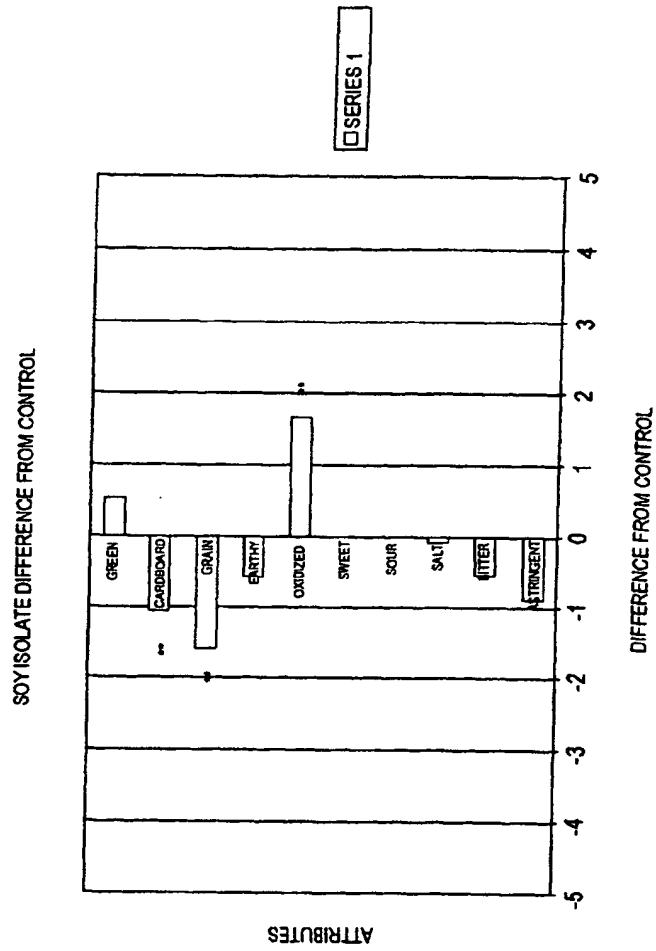


FIG. 10



European Patent  
Office

# EUROPEAN SEARCH REPORT

Application Number  
EP 01 30 9909

DOCUMENTS CONSIDERED TO BE RELEVANT			
Category	Citation of document with indication, where appropriate, of relevant passages	Relevant to claim	CLASSIFICATION OF THE APPLICATION (Int.Cl.7)
X	GB 1 580 051 A (UNILEVER LTD) 26 November 1980 (1980-11-26)	1,6-11, 13,14	A23L1/211 A23L1/277
Y	* the whole document *	2-5,12	A23J3/16
D,Y	US 4 420 425 A (LAWHON JAMES T) 13 December 1983 (1983-12-13)	2-5	
A	* column 12, line 34-57; claims 1-3; figure 1 *	1,6-14	
D,Y	US 4 091 120 A (GOODNIGHT JR KENNETH C ET AL) 23 May 1978 (1978-05-23)	12	
A	* column 2, line 30 - column 3, line 66; claim 1 *	1-11,13, 14	
A	US 4 530 788 A (CHANG PEI K) 23 July 1985 (1985-07-23)	1-14	
	* column 2, line 23-27; claims 1-19 * * column 3, line 39-67 *		
A	US 4 908 224 A (YODER LOIS) 13 March 1990 (1990-03-13)	1-14	
	* claims 1-13 *		
D,A	US 5 658 714 A (SCHIMPF KAREN JOYCE ET AL) 19 August 1997 (1997-08-19)	1-14	
	* claims 1-22 *		
D,A	US 4 761 186 A (SCHARA ROBERT E ET AL) 2 August 1988 (1988-08-02)	1-14	
	* claims 1-6; example 1 *		
The present search report has been drawn up for all claims			
Place of search <b>THE HAGUE</b>		Date of completion of the search <b>5 March 2002</b>	Examiner <b>De Jong, E</b>
CATEGORY OF CITED DOCUMENTS		I : theory or principle underlying the invention E : earlier patent document, but published on, or after the filing date D : document cited in the application I : document cited for other reasons & : member of the same patent family, corresponding document	
X : particularly relevant if taken alone Y : particularly relevant if combined with another document of the same category A : technological background O : non-written disclosure P : intermediate document			

EPJPCPV (503 03 82 104021)

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 9909

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-03-2002

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
GB 1580051 A	26-11-1980	BE 855597 A1	12-12-1977
		CA 1080026 A1	24-06-1980
		DE 2726185 A1	22-12-1977
		FR 2354055 A1	06-01-1978
		IE 45421 B1	25-08-1982
		IT 1083508 B	21-05-1985
		JP 1069185 C	23-10-1981
		JP 52154553 A	22-12-1977
		JP 56012421 B	20-03-1981
		LU 77524 A1	26-01-1978
		NL 7706381 A	13-12-1977
		SE 7706793 A	12-12-1977
US 4420425 A	13-12-1983	AT 27090 T	15-05-1987
		AU 568600 B2	07-01-1988
		AU 1882883 A	23-02-1984
		BR 8307480 A	14-08-1984
		DE 3371462 D1	19-06-1987
		DK 163084 A	22-03-1984
		EP 0115521 A1	15-08-1984
		JP 59501653 T	04-10-1984
		WO 8400474 A1	16-02-1984
US 4091120 A	23-05-1978	AU 518914 B2	29-10-1981
		AU 2910777 A	05-04-1979
		BE 860823 A1	16-05-1978
		CA 1078248 A1	27-05-1980
		CH 632395 A5	15-10-1982
		CY 1236 A	29-06-1984
		DE 2751024 A1	24-05-1978
		FR 2370439 A1	09-06-1978
		GB 1581699 A	17-12-1980
		HK 45884 A	01-06-1984
		JP 1364334 C	09-02-1987
		JP 53062851 A	05-06-1978
		JP 61033543 B	02-08-1986
		KE 3384 A	23-03-1984
		MY 45085 A	31-12-1985
		NL 7712502 A	17-05-1978
		NZ 185305 A	16-03-1981
		NZ 194732 A	31-05-1982
		PH 15322 A	18-11-1982
		SE 437460 B	04-03-1985
		SE 7712846 A	16-05-1978
		SG 13784 G	15-02-1985
		ZA 7706754 A	27-09-1978

57404-2002-04-03

For more details about this annex : see Official Journal of the European Patent Office, No. 12/82

**ANNEX TO THE EUROPEAN SEARCH REPORT  
ON EUROPEAN PATENT APPLICATION NO.**

EP 01 30 9909

This annex lists the patent family members relating to the patent documents cited in the above-mentioned European search report. The members are as contained in the European Patent Office EDP file on  
The European Patent Office is in no way liable for these particulars which are merely given for the purpose of information.

05-03-2002

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
US 4530788 A	23-07-1985	BR 8306656 A	17-07-1984
		CA 1223867 A1	07-07-1987
		JP 59109138 A	23-06-1984
US 4908224 A	13-03-1990	NONE	
US 5658714 A	19-08-1997	CA 2060973 A1	29-08-1992
		DE 69207228 D1	15-02-1996
		DE 69207228 T2	04-07-1996
		EP 0501117 A1	02-09-1992
		IE 914558 A1	09-09-1992
		US 5270450 A	14-12-1993
US 4761186 A	02-08-1988	CA 1291751 A1	05-11-1991

F-530459 P0459

For more details about this annex : see Official Journal of the European Patent Office, No 12/82

**THIS PAGE BLANK (USPTO)**

**This Page is Inserted by IFW Indexing and Scanning  
Operations and is not part of the Official Record**

**BEST AVAILABLE IMAGES**

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

- ☐ **BLACK BORDERS**
- ☐ **IMAGE CUT OFF AT TOP, BOTTOM OR SIDES**
- ☐ **FADED TEXT OR DRAWING**
- ☐ **BLURRED OR ILLEGIBLE TEXT OR DRAWING**
- ☐ **SKEWED/SLANTED IMAGES**
- ☐ **COLOR OR BLACK AND WHITE PHOTOGRAPHS**
- ☐ **GRAY SCALE DOCUMENTS**
- ☐ **LINES OR MARKS ON ORIGINAL DOCUMENT**
- ☐ **REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY**
- ☐ **OTHER:** \_\_\_\_\_

**IMAGES ARE BEST AVAILABLE COPY.**

**As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.**

**THIS PAGE BLANK (USPTO)**